

Rev. 12/17/07


### Humidity Transmitter Description

BAPI humidity transmitters provide a high accuracy 4 to 20mA, 0 to 5V or 0 to 10V humidity measurement. Accuracies of 2% or 3% RH are available. Room units are protected by a molded housing with an integral filter, while duct and outside air units come with a removeable 100 micron sintered stainless steel filter. On duct and outside air units the filter may be cleaned with warm, distilled water.

These units are microprocessor based and do not require any field calibration. In addition, replacement sensors (room units) and probes (duct and outside air units) can be purchased and installed without calibration. In fact, installing a replacement part will result in the unit having the accuracy of the replacement and not necessarily the original unit. For example, a 3% room unit could be made into a 2% unit simply by purchasing and installing a 2% sensor.

For all non-room configurations, BAPI humidity transmitters come standard in a ruggedized package. Ruggedized transmitters are suitable for locations where moisture or condensation may be a problem. The potting material used to ruggedize the transmitters has a high thermal conductivity to eliminate circuit overheating and a low thermal expansion to minimize the stress on the circuit components. Due to the extremely low moisture absorption properties of the epoxy, a ruggedized transmitter will remain operational even if temporarily immersed in water.

Many tests and studies have been conducted on the sensor incorporated into these humidity transmitters to assure that they provide long-term accuracy and durability. For applications requiring even higher accuracy, however, certified units are available which have been tested and offset against an NIST traceable reference. Please call for details or with specific requirements.

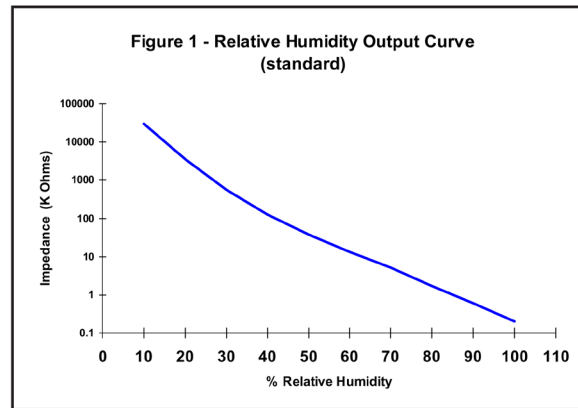

### Specifications

#### Output Ranges:

4 to 20 mA, 0 to 5 V, or 0 to 10 V

#### Power:

10 to 35 VDC (0 -5 VDC or 4 - 20 mA outputs)  
 15 to 35 VDC (0 - 10 VDC Output)  
 12 to 24 VAC (0 -5 VDC or 4 - 20 mA outputs)  
 15 to 24 VAC (0 - 10 VDC Output)

#### Power Consumption:

22 mA max. DC (0 -5 VDC or 4 - 20 mA Outputs)  
 6 mA max. DC (0 - 10 VDC Output)  
 0.53 VA max. AC (0 -5 VDC or 4 - 20 mA Outputs)  
 0.14 VA max. AC (0 -10 VDC Output)

#### Sensing Element:

Impedance type humidity sensor

#### Operating RH Range:

0 to 100 %RH (non-condensing)

#### Operating Temperature Range:

Room: 0 to 70 °C (32 to 158 °F)  
 Duct & Outside: -23 to 71 °C (-10 to 160 °F)

#### Accuracy Range: from 15 to 95% RH at 25°C

#### Response Time: 20 seconds for a 63% step

#### Drift: <2% RH over 5 years



# Humidity Transmitter Output Table

Temperature, Humidity & Pressure Sensors & Transmitters

Rev. 12/17/07

## Humidity Transmitter Output Table

%RH	5V	10V	mA
0	0.00	0.00	4.000
1	0.05	0.10	4.160
2	0.10	0.20	4.320
3	0.15	0.30	4.480
4	0.20	0.40	4.640
5	0.25	0.50	4.800
6	0.30	0.60	4.960
7	0.35	0.70	5.120
8	0.40	0.80	5.280
9	0.45	0.90	5.440
10	0.50	1.00	5.600
11	0.55	1.10	5.760
12	0.60	1.20	5.920
13	0.65	1.30	6.080
14	0.70	1.40	6.240
15	0.75	1.50	6.400
16	0.80	1.60	6.560
17	0.85	1.70	6.720
18	0.90	1.80	6.880
19	0.95	1.90	7.040
20	1.00	2.00	7.200
21	1.05	2.10	7.360
22	1.10	2.20	7.520
23	1.15	2.30	7.680
24	1.20	2.40	7.840
25	1.25	2.50	8.000
26	1.30	2.60	8.160
27	1.35	2.70	8.320
28	1.40	2.80	8.480
29	1.45	2.90	8.640
30	1.50	3.00	8.800
31	1.55	3.10	8.960
32	1.60	3.20	9.120
33	1.65	3.30	9.280
34	1.70	3.40	9.440
35	1.75	3.50	9.600
36	1.80	3.60	9.760
37	1.85	3.70	9.920
38	1.90	3.80	10.080
39	1.95	3.90	10.240
40	2.00	4.00	10.400
41	2.05	4.10	10.560
42	2.10	4.20	10.720
43	2.15	4.30	10.880
44	2.20	4.40	11.040
45	2.25	4.50	11.200
46	2.30	4.60	11.360
47	2.35	4.70	11.520
48	2.40	4.80	11.680
49	2.45	4.90	11.840

%RH	5V	10V	mA
50	2.50	5.00	12.000
51	2.55	5.10	12.160
52	2.60	5.20	12.320
53	2.65	5.30	12.480
54	2.70	5.40	12.640
55	2.75	5.50	12.800
56	2.80	5.60	12.960
57	2.85	5.70	13.120
58	2.90	5.80	13.280
59	2.95	5.90	13.440
60	3.00	6.00	13.600
61	3.05	6.10	13.760
62	3.10	6.20	13.920
63	3.15	6.30	14.080
64	3.20	6.40	14.240
65	3.25	6.50	14.400
66	3.30	6.60	14.560
67	3.35	6.70	14.720
68	3.40	6.80	14.880
69	3.45	6.90	15.040
70	3.50	7.00	15.200
71	3.55	7.10	15.360
72	3.60	7.20	15.520
73	3.65	7.30	15.680
74	3.70	7.40	15.840
75	3.75	7.50	16.000
76	3.80	7.60	16.160
77	3.85	7.70	16.320
78	3.90	7.80	16.480
79	3.95	7.90	16.640
80	4.00	8.00	16.800
81	4.05	8.10	16.960
82	4.10	8.20	17.120
83	4.15	8.30	17.280
84	4.20	8.40	17.440
85	4.25	8.50	17.600
86	4.30	8.60	17.760
87	4.35	8.70	17.920
88	4.40	8.80	18.080
89	4.45	8.90	18.240
90	4.50	9.00	18.400
91	4.55	9.10	18.560
92	4.60	9.20	18.720
93	4.65	9.30	18.880
94	4.70	9.40	19.040
95	4.75	9.50	19.200
96	4.80	9.60	19.360
97	4.85	9.70	19.520
98	4.90	9.80	19.680
99	4.95	9.90	19.840
100	5.00	10.00	20.000