




Features & Options

- 3 or 5 Circuit Power Distribution
- 12 to 30 VAC/VDC Operation
- Master Power Switch w/ 10 Amp Breaker
- Individual Circuit Power Switches
- Individual 3 Amp Circuit Protection
- Power and Fault LEDs

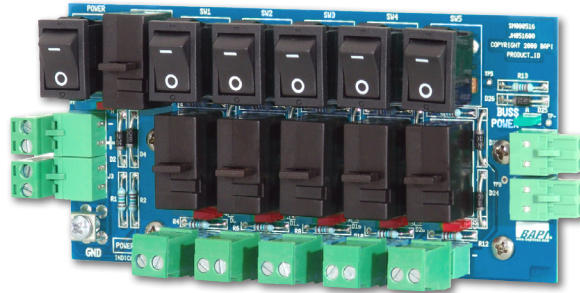

PDM - Power Distribution Module (BA/PDM-5-B)



The PDM - Power Distribution Module is a low voltage (12 to 30 VAC/VDC) power distribution module designed to take a single power source and distribute that power to multiple circuits. It comes in 3 or 5 circuit models which can be linked together to achieve multiple circuits. A common On/Off switch and 10 amp breaker powers the distributed circuits. Each individual circuit has an On/Off switch, field connection terminals, 3 amp fuse or 3 amp breaker and individual power and fault LEDs.

Ordering Information

<u>Part Number</u>	<u>Description</u>	<u>List Price</u>
BA/PDM-5-B	Five circuit Power Distribution Module, with breaker	\$364
BA/PDM-3-B	Three circuit Power Distribution Module, with breaker	\$277
BA/PDM-5-F	Five circuit Power Distribution Module, with fuse	\$218
BA/PDM-3-F	Three circuit Power Distribution Module, with fuse	\$182
BA/PDM-5-B-DIN	Five circuit Power Distribution Module, with breaker, DIN mount	\$364
BA/PDM-3-B-DIN	Three circuit Power Distribution Module, with breaker, DIN mount	\$277
BA/PDM-5-F-DIN	Five circuit Power Distribution Module, with fuse, DIN mount	\$218
BA/PDM-3-F-DIN	Three circuit Power Distribution Module, with fuse, DIN mount	\$182

Submittal datasheets without List Prices are available on our website at www.bapihvac.com

Specifications

Supply Voltage: 12 to 30 VAC/VDC, 10 amps max

Circuit Distribution: 3 or 5 circuits

Circuit Protection:

- Master Breaker 10 amp, push to reset
- Individual Fuses 3 amp, slow blow (20mm)
- Individual Breakers 3 amp, push to reset

Visual Indicators:

- Power Green LED, master & individual
- Fault Red LED, master & individual

On/Off Switching:

- Master Common rocker switch
- Circuit Individual rocker switch

Connection: Plug in terminal strip,
Cage clamp, 28 to 12 AWG

Mounting: 2.75" snaptrack

Ambient: -40 to 158°F (-40 to 70°C)

Warranty: 5 years

