


Duct Units

Ordering Information		T10K Transmitter Grid for Combo Temp./Humidity Duct Units													
BA/	Sensor Type Use the designator number (shown to the left in bold) to indicate the sensor (required selection)														
T10K[range]	TEMPERATURE TRANSMITTERS <i>Must include a "range" figure</i> T10K[range] 10K Thermistor, 10,000 Ω @ 25 °C with 4 to 20 mA Output TEMPERATURE TRANSMITTER RANGES Custom temperature transmitter ranges are available. Common ranges are listed below <table border="0"> <tr> <td>40 TO 90F</td> <td>4 TO 32C</td> <td>32 TO 134F</td> <td>0 TO 57C</td> </tr> <tr> <td>0 TO 100F</td> <td>-18 TO 38C</td> <td>-30 TO 130F</td> <td>-34 TO 54C</td> </tr> <tr> <td>20 TO 120F</td> <td>-7 TO 48C</td> <td></td> <td></td> </tr> </table>			40 TO 90F	4 TO 32C	32 TO 134F	0 TO 57C	0 TO 100F	-18 TO 38C	-30 TO 130F	-34 TO 54C	20 TO 120F	-7 TO 48C		
40 TO 90F	4 TO 32C	32 TO 134F	0 TO 57C												
0 TO 100F	-18 TO 38C	-30 TO 130F	-34 TO 54C												
20 TO 120F	-7 TO 48C														
	Humidity Transmitter (required selection)														
	-H205	±2% Humidity Transmitter with 0 to 5 V output for temperature & humidity transmitters													
	-H210	±2% Humidity Transmitter with 0 to 10 V output for temperature & humidity transmitters**													
	-H220	±2% Humidity Transmitter with 4 to 20 mA* output for temperature & humidity transmitters													
	-H305	±3% Humidity Transmitter with 0 to 5 V output for temperature & humidity transmitters													
	-H310	±3% Humidity Transmitter with 0 to 10 V output for temperature & humidity transmitters**													
	-H320	±3% Humidity Transmitter with 4 to 20 mA* output for temperature & humidity transmitters													
	Enclosure (required selection)														
	-D-BB	BAPI-Box Enclosure - IP66 rated, UV-resistant polycarbonate													
	-D-BB2	BAPI-Box 2 Enclosure - IP66 rated, UV-resistant polycarbonate													
	-D-EU	Weather Tight Enclosure - IP66 rated ABS polymer enclosure													
	-D-EUO	Weather Tight Enclosure - IP66 rated UV-resistant enclosure													
	-D-WP	Weatherproof Enclosure - NEMA 3R rated metal enclosure													
EXAMPLE															
BA/	T10K[range]	-H205	D-EUO												
Example Part Number: BA/T10K[65 TO 80F]-H205-D-EUO															
Your Part Number															

*DC input voltage is required for current output.

**0-10 volt output requires a WP doublegang enclosure.

Call BAPI if you have questions about the above ordering grid or the configuration of the product you are ordering.

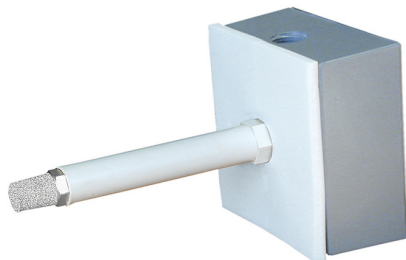

Doublegang D-WP Enclosure
 (Units with a T100 or T1K Transmitter and a Humidity Transmitter require a doublegang Weatherproof (WP) enclosure or BAPI-Box (BB) enclosure. Units with a T10K transmitter and 4-20 mA or 0-5V outputs do not require a doublegang enclosure.)