




Overview

Many electrical, water or gas meters provide a pulse output with each pulse representing a specific quantity of the media being measured. These pulse outputs often need to be electrically isolated from the controller's input by a buffer.

The PMPB5 provides that buffer by receiving the pulses from the meter and recreating them as dry contact closures. An LED lights whenever the buffer contacts are closed. The PMPB5 fits standard 2.75" snaptrack.

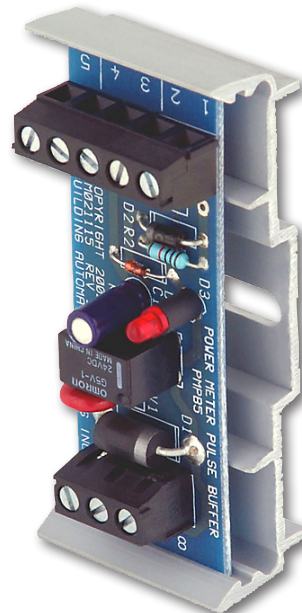

PMPB5 mounted in optional 2.75" snaptrack

Ordering Information

Part Number	Description	List Price
BA/PMPB5	PMPB	\$27.50
BA/PMPB5-TRK	PMPB with 1.25" piece of 2.75" Snaptrack	\$32.50

Submittal datasheets without List Prices are available on our website at www.bapihvac.com

Specifications

Power:

24VAC 50/60HZ @ 25mA (0.6VA)

Contact Rating:

1A @ 24VAC maximum, 1mA @ 5VDC minimum)

Contact Repetition Rate:

2 seconds per pulse maximum

