





Features & Options

- 304 Stainless Steel Probes: 12", 18", 24", 36" & 48" lengths
- Very Thin Probe to Fit Between Coil Fins
- Three Enclosure Styles

Submersible Duct Units feature closed cell foam to seal the probe insertion hole and absorb vibration and mounting tabs for easy installation. All units have etched Teflon leadwires and encapsulated sensors to create a watertight package that can perform under real world conditions.

Submersible Duct Units are available in probe lengths of 12", 18", 24", 36" and 48". Custom probe lengths are also available.

Submersible Duct Units come standard with a 2"x4" steel J-Box but are also available with no box or the new BAPI-Box Crossover enclosure.

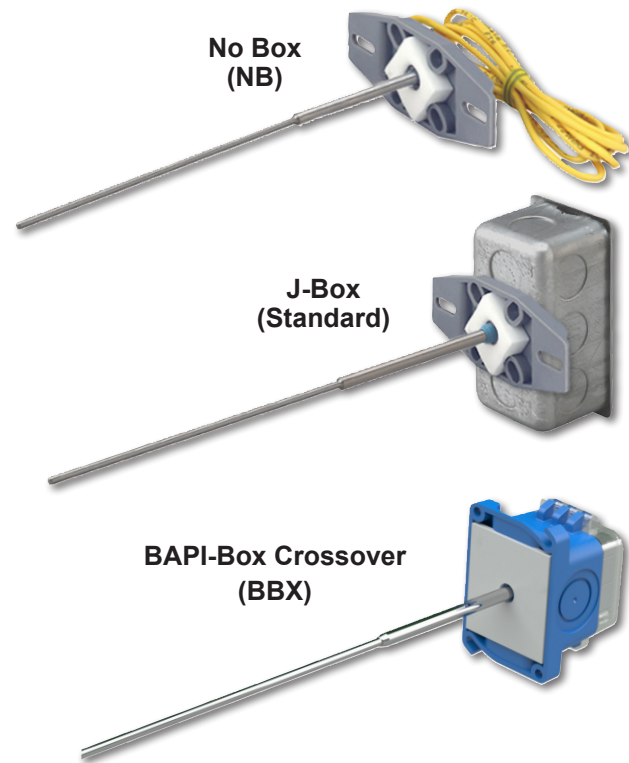

The New BAPI-Box Crossover Enclosure

The new BAPI-Box Crossover features a hinged cover with thumb latch for easy termination. A pierceable knockout plug is available for the open port. See the Accessories section for more info.

(Units shown with knockplug plug sold separately.)



Specifications

Environmental Operation Range:

Temperature:

BAPI-Box Crossover: -40 to 85 °C

Other Enclosures: -40 to 100 °C

Humidity: 0 to 100%, non-condensing

Sensing Element:

Thermistor or RTD (See Sensors Section for Specs.)

Probe Material:

Stainless Steel, 1/8" dia. with 4" sleeve (1/4" dia.)

Enclosure Material:

Junction Box: Galvanized Steel

BAPI-Box Crossover:

UV-resistant polycarbonate, UL94, V-0

Enclosure Rating:

Junction Box: IP20, NEMA 1

BAPI-Box Crossover (BBX):

IP10, NEMA 1

IP44 with knockout plug in open port

Encl. Dimensions: H x W x D

BAPI-Box Crossover:

3.1 x 2.2 x 1.9" (79 x 56 x 49mm)

Junction Box

4.2 x 3.9 x 1.94" (106 x 98.4 x 49mm)

(For enclosure dimension drawings, see the end of the section.)





Use the Option Selection Guide below to create your custom part number. Replace the number and parenthesis with the designator for each selection. Skip the designator and dashes for optional selections that are not required in your configuration.



Submersible Duct Sensor Option Selection Guide

BA/ (#1) - (#2) - (#3) - (#4)

#1: Temperature Sensor (required)

- 1.8K 1.8K Thermistor
- 3K 3K Thermistor
- 10K-2 10K-2 Thermistor
- 10K-3 10K-3 Thermistor
- 10K-3[11K] 10K-3[11K] Thermistor
- 20K 20K Thermistor
- 1K[375] 1K Platinum RTD (375 curve)
- 1K[Ni] 1K Ω Nickel RTD
- 1K 1K Platinum RTD (385 curve)

Transmitters below require a BAPI-Box Crossover Enclosure

- T1K[32 TO 212F] 1K Plat. RTD Transmitter, 4 to 20 mA Output, 32 to 212°F Range
- T1K[20 TO 120F] 1K Plat. RTD Transmitter, 4 to 20 mA Output, 20 to 120°F Range
- T1K[0 TO 100F] 1K Plat. RTD Transmitter, 4 to 20 mA Output, 0 to 100°F Range
- T1K[0 TO 100C] 1K Plat. RTD Transmitter, 4 to 20 mA Output, 0 to 100°C Range
- T1K[-7 TO 49C] 1K Plat. RTD Transmitter, 4 to 20 mA Output, -7 to 49°C Range
- T1K[-18 TO 38C] 1K Plat. RTD Transmitter, 4 to 20 mA Output, -18 to 38°C Range

Matched Transmitters are also available. Contact your BAPI representative for ordering.

#2: Probe Type and Length (required)

- SD-12" Submersible Duct, 12" (0.3m) length
- SD-18" Submersible Duct, 18" (0.46m) length
- SD-24" Submersible Duct, 24" (0.6m) length
- SD-36" Submersible Duct, 36" (0.9m) length
- SD-48" Submersible Duct, 48" (1.2m) length

#3: Enclosure and Lead Length (optional, J-Box comes standard)

- BBX BAPI-Box Crossover (IP10, NEMA 1)
- NB No Box (comes with 6" Etched Teflon Leads)

#4: Test & Balance or Terminal Strip (optional, requires a BAPI-Box Crossover enclosure)

- TB Test & Balance Switch
- TS Terminal Strip Connection

Additional options are available for these units but not shown in this Selection Guide. Contact your BAPI representative for the complete list of options.

Example Number: BA/ (**10K-2**) - (**SD-24"**) - (**BBX**) - ()

Actual Number (with parenthesis removed): BA/10K-2-SD-24"-BBX

Description: 10K-2 Thermistor, Submersible Duct Sensor, BAPI-Box Crossover Enclosure

Your Number: BA/

Gray shaded items follow the Buy and Resale Multiplier.